

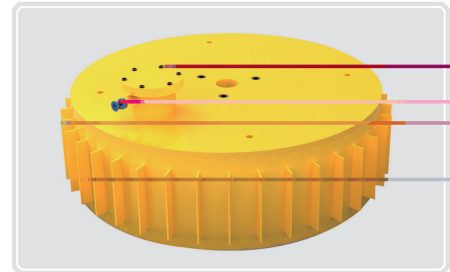


# RCDB PDC

适用范围:

技术特点:



0.1-50

主要技术参数:

RCDB :

	mm	h mm	mT	mm	kw	m/s	kg	mm			
								A	B	D	d
RCDB-5	500	150	60	90	1	4.5	360	280	325	630	450
RCDB-6	600	175	60	120	1.6		480	280	325	740	500
RCDB-6.5	650	200	70	150	2		560	305	400	780	640
RCDB-8	800	250	70	200	3.6		800	310	400	960	780
RCDB-10	1000	300	70	250	5		1350	310	400	1300	920
RCDB-12	1200	350	70	300	6.8		2000	338	425	1500	1140
RCDB-14	1400	400	70	350	9		2500	336	440	1600	1200
RCDB-16	1600	450	70	400	13		4800	500	570	1850	1400
RCDB-18	1800	500	70	450	18		6100	530	610	2150	1800

RCDB- T : ( )

		mm	mm	mT	kw	m/s	mm		kg
							Dx B		
RCDB-6.5	T1	650	200	90	4	5.8	960x 390	800	
	T2			120	6		960x 480	1450	
	T3			150	10		1000x 550	2120	
RCDB-8	T1	800	250	90	5.3		1200x 400	1360	
	T2			120	7.5		1200x 450	1920	
	T3			150	11.5		1300x 520	2000	
RCDB-10	T1	1000	300	90	7.1		1300x 450	2450	
	T2			120	9		1300x 540	3010	
	T3			150	14		1500x 560	2500	
RCDB-12	T1	1200	350	90	9		1500x 480	3290	
	T2			120	13.5	1500x 560	4100		
	T3			150	16	1600x 620	5300		
RCDB-14	T1	1400	400	90	11.5	1750x 580	3700		
	T2			120	18	1750x 700	5100		
	T3			150	25	1950x 880	6500		
RCDB-16	T1	1600	450	90	18	1900x 620	5800		
	T2			120	25	1950x 680	7100		
	T3			150	40	2000x 850	9320		
RCDB-18	T1	1800	500	90	25	2150x 920	7350		
	T2			120	32	2200x 1030	9200		
	T3			150	45	2200x 1030	13800		
RCDB-20	T1	2000	550	90	30	2200x 1030	8600		
	T2			120	40	2350x 1080	13500		
	T3			150	50	2650x 1320	17200		